


## STAINLESS STEEL FLEXIBLE JOINT UNION TYPE

Model: SSFH-SE

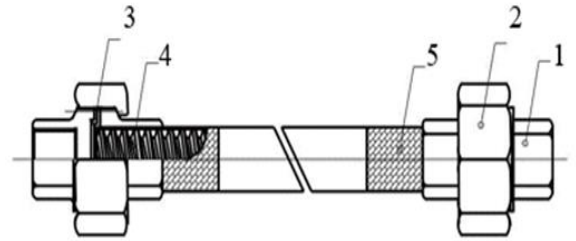

### TECHNICAL DATA

#### SPECIFICATION STANDARDS

Standard: BS-EN

Face to face: L = 300/500mm or upon request.

Working medium: Cold / Hot water, Air, Gas, Oil, Steam

Working pressure: 16/25 Bar

Working temperature: < 250°C

Thread connection: BSPT (BS21)

Other sizes and length are available on request

#### STANDARD MATERIALS OF MAIN PARTS

NO	PART NAME	MATERIAL
1	UNION SCREW	MALLEABLE IRON/ STAINLESS STEEL
2	UNION NUT	MALLEABLE IRON/ STAINLESS STEEL
3	GASKET	NON ASBESTOS
4	FLEXIBLE TUBE	SS304
5	BRAID	SS304

### DIMENSION (mm)

DN	INCH	LENGHT	PN
DN15	½"	300/500	16/25
DN20	¾"	300/500	16/25
DN25	1"	300/500	16/25
DN32	1 ¼"	300/500	16/25
DN40	1 ½"	300/500	16/25
DN50	2"	300/500	16/25