




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

STAINLESS STEEL EXPANSION JOINT PN10/ PN16/ PN25

Model: JF-150SG

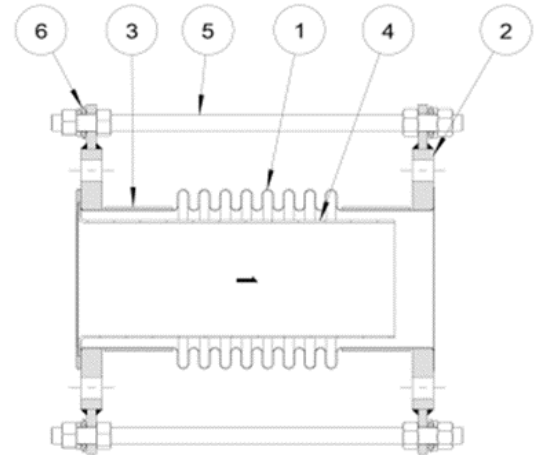

Technical Data

STANDARD MATERIALS OF MAIN PARTS

NO	PARTS	MATERIAL	REMARKS
1	BELLOW	SS304	SUS 316/ 321
2	FLANGES	CAST STEEL	SUS 400/ 304/ 316/ 321
3	END PIPE	CAST STEEL	SUS 400/ 304/ 316/ 321
4	LINER	SS304	SUS 316/ 321
5	TIE RODS	525C	SUS 304
6	GASKET	EPDM	OTHER ELASTOMERS

TECHNICAL SPECIFICATION

Total Length: L = 300/500 mm
Max working pressure: PN10, PN16, PN25
Max temparture working: 250 °C
Applicable: Water, oil, chemicals, Steam..ETC

Non-Welded Type

For Pumps inlet and outlet conecting with tube or absorbing vibration and reducing noises

Sealing surface is molded with bellows at once without welding. The corrosion of welded material can be eliminated

1: The size, total length and pressure tabilated above are standard

We can also produce products according your requirement

2: Flange JIS, ANSI, BS, DIN and ETC




UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

STAINLESS STEEL EXPANSION JOINT PN10/ PN16/ PN25

Model: JF-150SG

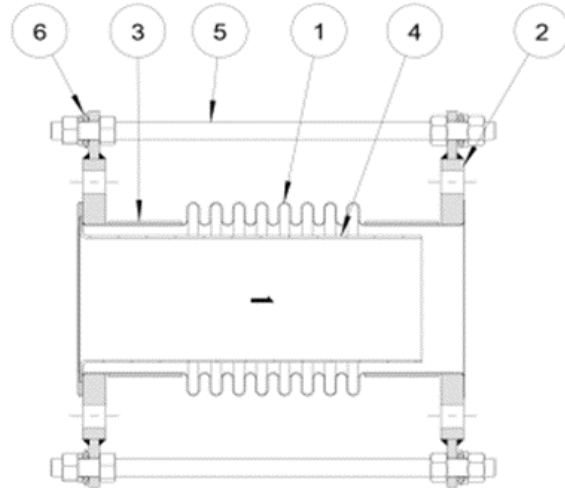

SPECIFICATION

Size		Total Length		Axial Movement	Working Pressure
mm	Inches	mm	Inches	mm	Bars
DN40	1 1/2"	300/ 500	12	-40/ +10	PN10, 16, 25
DN50	2"	300/ 500	12	-40/ +10	PN10, 16, 25
DN65	2 1/2"	300/ 500	12	-40/ +10	PN10, 16, 25
DN80	3"	300/ 500	12	-40/ +10	PN10, 16, 25
DN100	4"	300/ 500	12	-40/ +10	PN10, 16, 25
DN125	5"	300/ 500	12	-40/ +10	PN10, 16, 25
DN150	6"	300/ 500	12	-40/ +10	PN10, 16, 25
DN200	8"	300/ 500	12	-40/ +10	PN10, 16, 25
DN250	10"	300/ 500	12	-40/ +10	PN10, 16, 25
DN300	12"	300/ 500	12	-40/ +10	PN10, 16, 25
DN350	14"	300/ 500	12	-40/ +10	PN10, 16, 25
DN400	16"	300/ 500	12	-40/ +10	PN10, 16, 25

The content of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirement, consult Arita or its distributors, Arita reserves the right to change or modify product design without prior notice.