



## SEISMIC ISOLATION EXPANSION JOINT

### GENERAL FEATURES

Ayvaz seismic isolation expansion joints prevents the pipeline damage by absorbing very high amount of movements (X, Y, Z directions) in all directions such as earthquake and collapse. Its flexible and mobile structure eliminates the stress of rigid pipe systems. The bellows are designed and manufactured according to EJMA standards.

Ayvaz seismic isolation compensators are formed by combining classical gimball compensators and external pressure axial compensator. Thus, it absorbs the bigger lateral an axially movements than classic expansion joints.

The expansion joint has lateral movement capability in all directions thanks to the gimbals placed at both ends. The external pressure bellow system absorbs very high axial movements. These bellows systems prevent the risk of buckling due to pressure load.

#### **Material Products:**

Stainless steel in accordance with DIN17440; The fittings can be produced in stainless steel or carbon steel.

Design:	
Bellow:	EJMA 10th Edition
General Expansion Joint Design:	EN 14917

**Nominal Diameter:** DN25 (1") – DN5000 (200")

# Rotary flange, Fixed flange, Welding neck, Grooved, Thread **Pressure Values**:

Connection:

Seismic Isolation Compensator is produced in standard 175PSI / 250PSI pressure classes and special designs can be made for higher pressure classes. The operating pressure depends on the nominal diameter and the operating temperature.


#### **Temperature Range:**

From -196 °C to 600 °C depending on material selection.

#### Application:

Seismic isolation expansion joints can be used in fire, heating-cooling, sanitary installation, steam installation, medical gas etc., if the building has seismic (earthquake) insulator.

### SEISMIC ISOLATION EXPANSION JOINT

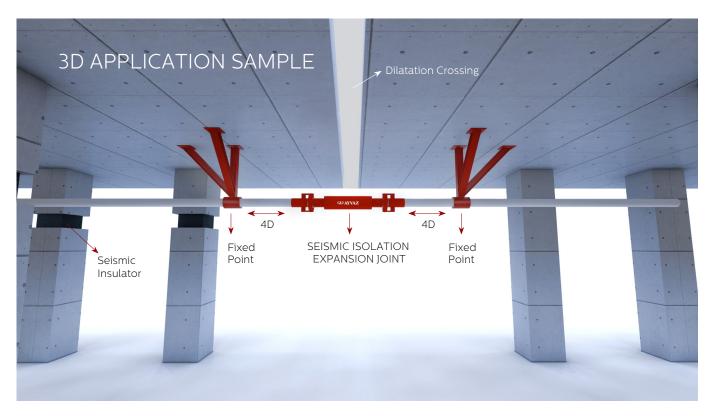

#### D: Pipe Diameter (cm)

#### Fixed Point Load Calculation:

Due to the axial movement capacity of the insulation type seismic expansion joint, the fixed points must be made to withstand the forces caused by the system pressure and the amount of movement.

Contact our sales team for detailed information.



#### HEAD OFFICE - FACTORY

Atatürk Sanayi Bölgesi Hadımköy Mahallesi Mustafa İnan Caddesi No: 44 Arnavutköy - İSTANBUL info@ayvaz.com | www.ayvaz.com

Cona	: Ayvaz Germany	: Ayvaz Ukraine	Tricorr	: Ayvaz Azerbaijan	: Ayvaz Egypt
Caserta/Italy	Viernheim/Germany	Kiev/Ukraine	Warsaw/Poland	Baku/Azerbaijan	Cairo/Egypt
Tel: +39 0823 187 3988	Tel: +49 62046014399	Tel: +380 44 390 57 57	Tel: +48 530 030 810	Tel: +99 (455) 579-84-32	Tel: +20 122 819 78 29
rmolaro@ayvaz.com	germany@ayvaz.com	info@ayvaz.com.ua	+48 533 603 335	ahayatov@ayvaz.com	andrew.eid@ayvaz.co
	:	:	tricorr@tricorr.eu	•	:

Ayvaz Gulf	Ayvaz China	: Ayvaz Kazakhstan LLP	: Ayvaz N	: Ayvaz Serbia	: Ayvaz Vietnam	: Ayvaz Americas
Dubai/U.A.E	Ningbo/China	Almaty/Kazakhstan	lsperih/Bulgaria	Belgrade/Serbia	HCMC/Vietnam	Rhode Island/USA
Tel: +971 563550822	Tel: +86 152 5830 7361				ggursoy@ayvaz.com	
+971 501306871	msahin@ayvaz.com	info_kz@ayvaz.com	office@ayvaz-n.eu	yakbiyik@ayvaz.com	Tel: +84 89 8508345	americas@ayvaz.com
mideast@ayvaz.com				•	•	•